

Complete unit combination 22 mm plastic metalized round key selector switch 3 switch positions KL-KC-KR with 2 keys 2X60DEG, V position latching removal pos. left, cent., right with holder screw terminal, 2 NO

product brand name	SIRIUS	
product category	Commanding and signaling devices	
product designation	Key-operated switch	
design of the product	Complete unit	
product type designation	3SB7	
product line	Metal, matt, 22 mm	
<b>Enclosure</b>		
shape of the enclosure front	round	
<b>Actuator</b>		
principle of operation of the actuating element	maintained	
product extension optional light source	No	
color of the actuating element	silver	
number of switching positions	3	
<b>Front ring</b>		
product component front ring	No	
material of the front ring	Metal	
color of the front ring	silver	
<b>General technical data</b>		
product function positive opening	Yes	
product component light source	No	
protection class IP	IP40	
mechanical service life (operating cycles) typical	50 000	
electrical endurance (operating cycles) typical	600 000	
<b>Weight</b>	69.305 g	
operating voltage rated value	240 ... 415 V	
number of NC contacts for auxiliary contacts	0	
number of NO contacts for auxiliary contacts	2	
number of CO contacts for auxiliary contacts	0	
<b>Ambient conditions</b>		
ambient temperature		
• during operation	-25 ... +55 °C	
• during storage	70 ... -25 °C	
<b>Installation/ mounting/ dimensions</b>		
fastening method	screw fixing	
mounting diameter	22 mm	
mounting height	46.5 mm	
installation width	30 mm	
<b>Approvals Certificates</b>		
General Product Approval	other	Environment



[Confirmation](#)

[Environmental Confirmations](#)

### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB7130-4AL11-1NA0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB7130-4AL11-1NA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SB7130-4AL11-1NA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SB7130-4AL11-1NA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB7130-4AL11-1NA0&lang=en)

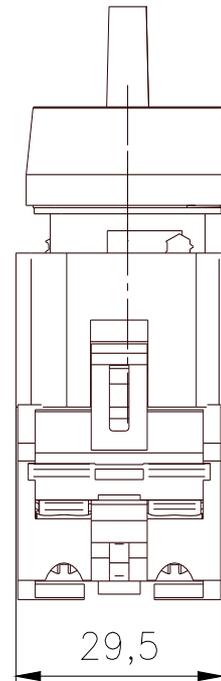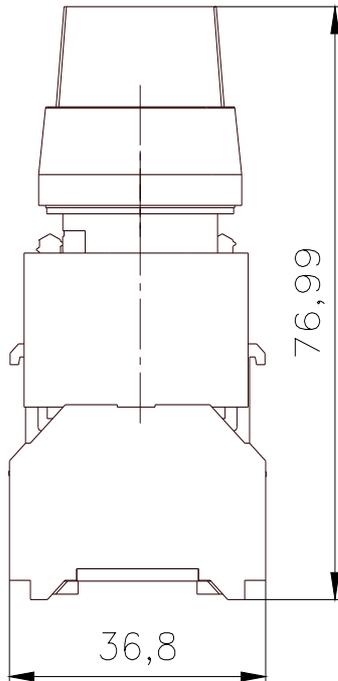

---

last modified:

6/30/2021 